

Model: **KD165W**

KOHLER Power Systems

220-415V

Diesel



Ratings Range

KD165W			
50HZ			
Standby :	kW	132	
	kVA	165	
Prime :	kW	120	
	kVA	150	

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested
- A one-year limited warranty covers all systems and components.
- John Deere engine with 12-volt battery charging alternator.
- KOHLER single-bearing alternator with insulation class H.
- Unit-mounted radiator with 50°C(122°F) ambient air capability.
- Skid and vibration isolators.
- Fuel Tank, 340 L (90 gal)
- Dry type air filter.
- Main line circuit breaker.
- Microprocessor controller.
- Battery, battery rack, and cables.
- Industrial 9 dB(A) reduction exhaust silencer (loose).
- Operation and installation literature.

Generator Set Ratings

Alternator	V	PH	Hz	Standby Rating		Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
4R13X	220/380	3	50	132/165	251	120/150	228
	230/400	3	50	132/165	238	120/150	217
	240/415	3	50	132/165	230	118/148	206



RATINGS: All three-phase units are rated at 0.8 power factor. See TIB-109 for generator set derate tables. Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions.

PRP: Prime power is available for an unlimited number of annual operating hours in variable load applications in accordance with ISO-8528/1.

A 10% overload capability is available for a period of 1 hour within a 12-hour period of operating in accordance with ISO-3046-1.

ESP: The emergency standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO-8528/1. Overload is not allowed. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Data

- NEMA-MG21 PART32, ISO8528, IEEE Std-115, CSA standards compliance for temperature rise and motorstarting.
- Self-ventilated and dripproof construction.
- Vacuum-impregnated windings with fungus-resistant epoxyvarnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor

Specifications	4R13X	50HZ
Ratings voltage		400V
Standby rating(27℃) , kVA		167.5
Standby rating(40℃) , kVA		155
Prime rating(40℃) , kVA		144
Efficiency (full load)		91
Air flow, ft ³ /min		716
Direct axis subtransient reactance (X"d), Per-unit value		0.080

Specifications	4R13X	Alternator
Manufacturer		KOHLER
Type		4-Pole Rotating-Field
Exciter type		PMG, Brushless
Leads: quantity, type		12, Reconnectable
Voltage regulator		Solid State, Fast Response
Insulation:		NEMA MG1
-Material		Class H
Bearing: quantity, type		1, Sealed
Coupling		Direct
Voltage regulation, no-load to full-load		± 1%

Application Data

Engine

Engine Specification	50 Hz
Manufacturer	John Deere
Engine model	6068HF120-153
Engine type	4-Cycle, Turbocharged, Aftercooled
Cylinder arrangement	6,L
Displacement, L (in3)	6.7 (410)
Bore and stroke, mm (in)	106 × 127 (4.17 × 5.0)
Compression ratio	17:1
Piston speed, m/min (ft/min)	381 (1248)
Rated rpm (r/min)	1500
Max. power at rated rpm, kW (BHP)	153 (205)
Valve material:	
Intake	Chromium-Silicon Steel
Exhaust	Stainless Steel
Governor type:	Mechanical
Frequency droop	±5%
Air cleaner type, all models	Dry

Exhaust

Exhaust System	50 Hz
Exhaust manifold type	Dry
Exhaust flow at rated kW, m3/min. (cfm)	23.1 (816)
Exhaust temperature at rated kW, dry exhaust, °C(°F)	555 (1031)
Maximum allowable back pressure, kPa (in Hg)	7.5 (2.2)
Exhaust outlet size at engine hookup, mm(in)	115 (4.53)

Engine Electrical

Engine Electrical System	50 Hz
Battery charging alternator:	
Ground(negative/positive)	Negative
Volts (DC)	12V
Starter motor rated voltage (DC)	12V
Battery, recommended cold cranking Amps (CCA):	
Quantity, CCA rating each	1, 760
Battery voltage (DC)	12V

Fuel

Fuel System	50 Hz
Max. fuel flow, Lph (gph)	108 (28.5)
Fuel prime pump	Manual
Recommended fuel	#2 Diesel
Fuel tank Capacity, L(gal)	340 (89.8)

Lubricating

Lubricating System	50 Hz
Type	Full Pressure
Oil pan capacity, L(qt)	20.6 (21.6)
Oil pan capacity with filter, L (qt)	21.5 (22.8)

Cooling


Radiator System	50 Hz
Ambient temperature, °C (°F)	50 (122)
Radiator system capacity, including engine, L (gal)	25.8 (6.8)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min)	55 (3127)
Water pump type	Centrifugal
Fan , kW (Hp)	3 (4)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in H2O)	0.2(0.8)

Application Data

Operation Requirements

Air Requirements	50 Hz
Radiator-cooled cooling air, m ³ /min (scfm)	266 (9409)
Combustion air, m ³ /min (ft ³ /min) - Air density = 1.20 kg/m ³ (0.075 lb/ft ³)	10.2 (360)
Fuel Consumption	50 Hz
Diesel, Lph (gph) at % load	
100% (Standby)	36.5 (9.6)
Diesel, Lph (gph) at % load	
100% (Prime)	33.5 (8.9)
75%	25.0 (6.6)
50%	17.0 (4.5)

Controller

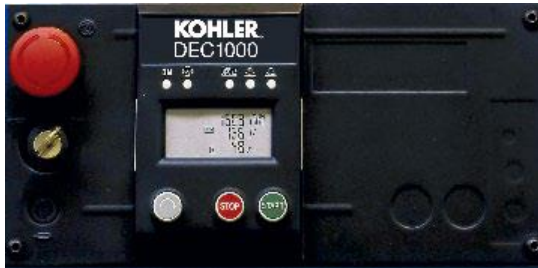

Decision-Maker™ 1000

Automation

- Test LEDs
- Voltage and speed stabilization

Engine Parameters

- Engine speed indication (with LCD message)
- Battery voltage indication (with LCD message)
- Elapsed hour meter (with LCD message)
- Fuel solenoid control
- Starter control

Measurements

- Frequency, Hz (with LCD message)

Operation and/or Safety Lights

- Oil pressure fault
- Water temperature fault
- Fail to start fault
- Overspeed fault (>60 kVA)
- Set ready for load
- Charging alternator fault
- General alarm
- General fault
- Panel lamp
- Emergency stop fault

Safety Devices

- Overspeed fault
- Automatic standby

Miscellaneous

- Fault reset
- Three-phase with or without neutral, two-phase, or single-phase use



Decision-Maker™ 4000

Standard Features

- Large LCD display panel
- Unique control wheel for system access
- User buttons for start, stop, menu, and escape
- Emergency stop button
- On/off key switch
- Panel-mounted battery fuse
- Panel-mounted USB ports for PC access and software upgrades
- Password-protected access to control parameters
- Upgradeable software for future enhancements
- Easy upgrade from Decision-Maker 1000

LCD Panel Features

- 600 x 800 resolution
- Multiple lines of text or graphic display
- Icons for quick identification of system status
- Six languages: Chinese, English, French, German, Portuguese, and Spanish

Communication Features

- Engine communication via CANbus
- Modbus communication via RS-485 or ethernet
- PC and flash drive connections via USB

Functions

- View and adjust system operation parameters
- View system faults

Viewable/Selectable Parameters (may require optional module)

- Voltage: phase-to-neutral, total voltage
- Current
- Frequency
- Power (active/reactive/apparent)
- Power factor
- Engine speed
- Oil pressure
- Coolant temperature
- Battery voltage
- Fuel level (%)
- Time delays

Viewable Faults (over 60 individual faults are monitored) including:

- Alternator protection (if equipped)
- Circuit breaker and ground fault protection
- Communication and engine ECM monitoring
- Cooling air monitoring
- Electrical charging system
- Engine cooling system
- Engine lube system
- Fuel system
- Generator set status

KOHLER® Power Systems

Enclosed Unit

- ☐ Sound Enclosure M226, 50 Hz, 68.8 dB(A) @ 7 m (23 ft.), Standby (with enclosed critical silencer)

Open Unit

- ☐ Exhaust Silencer, Critical 40 dB(A) Reduction
- ☐ Exhaust Silencer, Residential 29 dB(A) Reduction
- ☐ Flexible Exhaust Connector
- ☐ Protection Mesh for Exhaust Parts

Cooling System

- ☐ Block Heater
[recommended for ambient temperatures below 0°C (32°F)]
- ☐ Radiator Core Guard

Decision-Maker™ 1000 Controller

- ☐ Alarm Horn
- ☐ Analog Indicator
- ☐ Differential Protection with Time and Sensitivity Adjustment
- ☐ Differential Triggering Fault
- ☐ External ATS Position
- ☐ External Starting Order
- ☐ Line Voltages, Volts Indicator
- ☐ Overload or Short-Circuit Fault
- ☐ Permanent Insulation Controller
- ☐ Phase Currents, Amps Indicator
- ☐ Plug Preheating
- ☐ Plug Preheating Control
- ☐ Remote Start Capability
- ☐ Single Voltages, Volts Indicator
- ☐ Utility Sensing, 3-Phase
- ☐ Water Preheating Control

Decision-Maker™ 4000 Controller

- ☐ Alternator Protection
- ☐ Audible Alarm Module
- ☐ Five Expandable Modules with Four Inputs/Six Outputs Each
- ☐ Network Modules (RTC and GSM modems and ethernet router)
- ☐ NFPA-110 Module
- ☐ Remote Annunciator
- ☐ Voltage/Speed Adjustment Module
- ☐ WinTelys Software

Fuel System

- ☐ Automatic Fuel Tank Fill Kit
- ☐ Subbase Fuel Tank with Secondary Containment Basin
- ☐ Subbase Fuel Tank Leak Alarm
- ☐ Water Separator Fuel Filter

Electrical System

- ☐ Battery Charger, Equalize/Float Type
- ☐ Battery Isolator Switch

Engine and Alternator

- ☐ Alternator Strip Heater
- ☐ Air Cleaner, Heavy Duty (with air restriction indicator)
- ☐ Droop Kit with 3-Function Voltage Regulator
- ☐ Lube Oil Drain Pump
- ☐ PMG Alternator and Voltage Regulator
- ☐ Tropical Heavy-Duty Alternator Insulation

Miscellaneous Accessories

- ☐ _____
- ☐ _____
- ☐ _____

Dimensions and Weights


Open Model



Overall Size, L×W×H mm (in): 2370×1114×1480 (93×44×58)

Weight, wet, kg (lb.): 1939 (4275)

With Available Enclosure Accessory

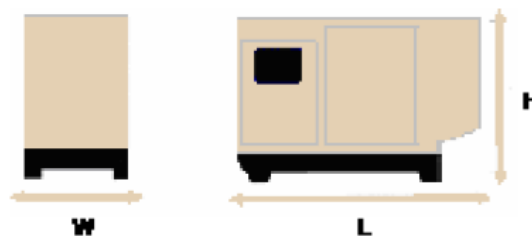

Overall Size, L×W×H mm (in): 3508×1200×1830 (138×47×72)

Weight, wet, kg (lb.): 2539 (5598)

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY: :